


technical specifications **trailed single auger vertical mixer «VN» series**

	Capacity m³	H.P. Requirements	Tyres	A (mm.)	B (mm.)	C (mm.)	D (mm.)	E (mm.)	F (mm.)	Empty Weight Kg.
VN 4	4,35	40	60x15,5 - 10,0	4034	2937	1797	1564	2346	500	2300
VN 6	6	50	30x11,5 - 14,5	4066	2835	2123	1900	2398	520	2600
VN 8	8	65	400/60 - 15,5	4515	3064	2441	2000	2651	645	3300
VN 10	10	75	400/60 - 15,5	4550	3064	2441	2000	2771	645	3440
VN 12	12	80	400/60 - 15,5	4664	3064	2576	2000	2928	645	3620
VN 14	14	85	400/60 - 15,5	4724	3064	2576	2000	3128	645	3750

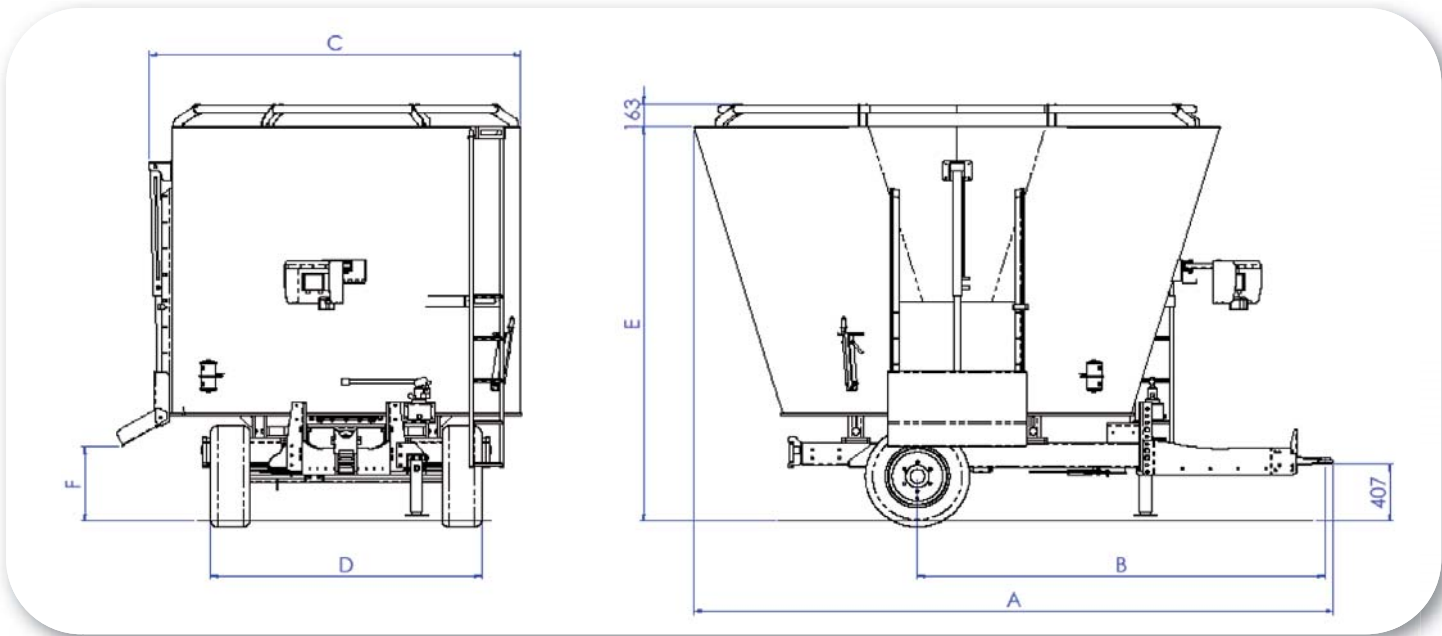

description **options «VN» serie**

- Hydraulic foot with manual pump.
- Extra door on the side.
- Elevator on side door.
- Hydraulic rising elevator on side door.
- Wide angle CV PTO shaft.
- Anti-overflow ring (Tube, rubber).
- 2 Hydraulic restrictor knives.
- Programmable scale.
- Magnet.
- Vertical roller for fiber.
- Hydraulic distributor with flexible manual remote control.
- Electric controls.
- Two speed gear box 540/1000 RPM.



UNE EN ISO 9001:2000
Nº 0.04.03211



INGENIERÍA Y MONTAJES MONZÓN, S.L. (INMOsa)

Polígono Industrial PAULES 53-55
22400 Monzón (Huesca) ESPAÑA


Tel: (+34) 974 401 336
FAX: (+34) 974 400 670

inmosa@grupotatoma.com
www.grupotatoma.com


Distribuidor

single auger vertical mixer-VN



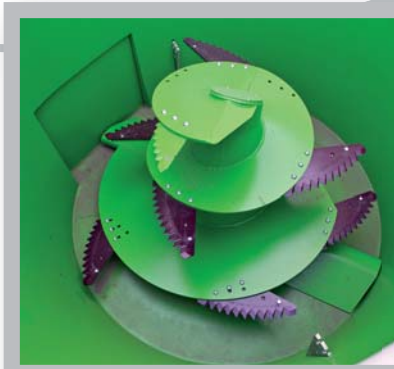

Heavy duty single auger equipped with high resistance toothed knives. Efficient design able to handle wet and dry stuff.

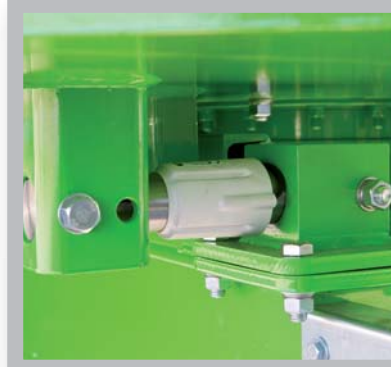

Three load cells.




Scale display (optional programmable).



Hydraulic elevator on side door.



Rubber anti-overflow extension.

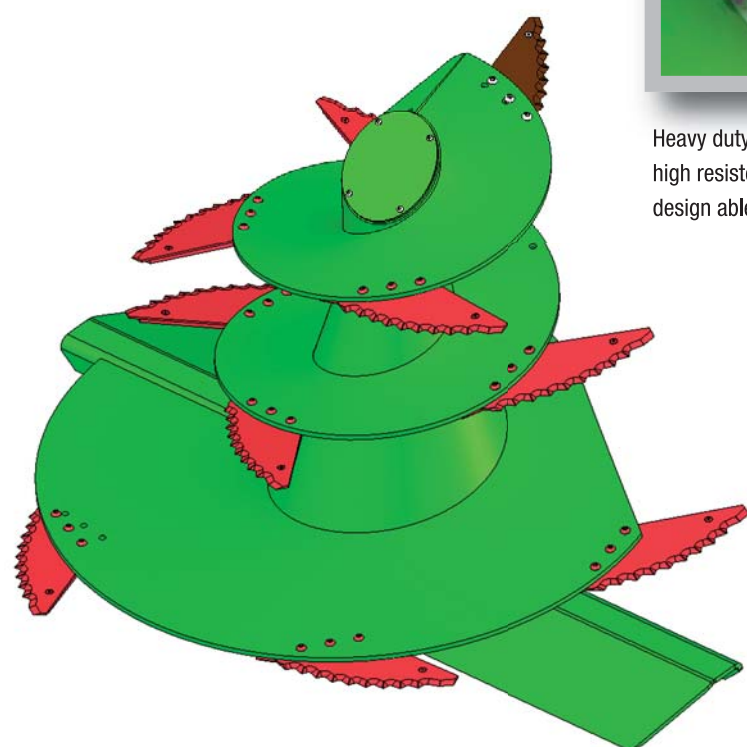

Pata hidráulica
OPCIONAL

